

# NT SERIES



# NT SERIES

## FULL RANGE

NT-10



**N**T-10 is a full range 2-way passive loudspeaker system with a 10"/2.5" VC LF woofer and a 1" HF compression driver on a rotatable 90° x 60° Converging Elliptical Device. finished in black textured paint with perforated metal grille backed with reticulated foam. Multiple internal rigging points for ground-support, truss and wall mounting. Pole mount socket, flush handle and Speakon NL4 connectors.



### Technical specifications

#### Type

Compact two-way passive speaker system

#### Frequency Response

60Hz-20kHz±3dB,-10dB@ 55Hz

#### Drivers

1x10"/2.5" VC LF Woofer,  
1x1" exit HF compression driver

#### Rated Power(RMS)

300W

#### Recommended Amplifier

300W-600W into 8ohms

#### Sensitivity(1W/1m)

96dB

#### Maximum SPL

119dB continuous,125dB peak

#### Nominal Impedance

8 ohms nominal

#### Dispersion(-6dB)

80°horizontal,50°vertical

#### Crossover

2kHz Passive

#### Finish

Textured black paint

#### Protective Grille

Black perforated steel

#### Connectors

2x Neutrik speakon NL4

#### Fittings

Top hat fitting

#### Dimensions

(W)330mmx(H)494mmx(D)317mm

#### Weight

23.5KG



# NT SERIES

NT-12



### Technical specifications

#### Type

Compact two-way passive speaker system

#### Frequency Response

55Hz-20kHz±3dB,-10dB@ 50Hz

#### Drivers

1x12"/3" VC LF Woofer,  
1x1.4" exit HF compression driver

#### Rated Power(RMS)

400W

#### Recommended Amplifier

400W-800W into 8ohms

#### Sensitivity(1W/1m)

98dB

#### Maximum SPL

123dB continuous,129dB peak

#### Nominal Impedance

8 ohms nominal

#### Dispersion(-6dB)

80°horizontal,50°vertical

#### Crossover

1.6kHz Passive

#### Finish

Textured black paint

#### Protective Grille

Black perforated steel

#### Connectors

2x Neutrik speakon NL4

#### Fittings

Top hat fitting

#### Dimensions

(W)380mmx(H)650mmx(D)364mm

#### Weight

26KG



**N**T-12 is a full range 2-way passive loudspeaker system with a 12"/3" VC LF woofer and a 1.4" HF compression driver on a rotatable 80° x 50° Converging Elliptical Device. finished in black textured paint with perforated metal grille backed with reticulated foam. Multiple internal rigging points for ground-support, truss and wall mounting. Pole mount socket, flush handle and Speakon NL4 connectors.



# NT SERIES

## FULL RANGE

NT-15



NT-15 is a 2-way full range loudspeaker that incorporates a 15" VC LF woofer and a 1.4" exit compression driver on an elliptical waveguide, equipped with an external sophisticated X-over network along with 2 Neutrik Speakon NL4, while an aluminum demodulating ring reduces distortion and improves midrange clarity at high levels and increased excursion is available via a triple roll surround and deep motor structure. NT-15 has two rectangular acoustic air outlets, constructed by 18-layer birch plywood and finished in black textured paint with perforated steel grille backed with acoustic foam.

### Technical specifications

#### Type

Compact two-way passive speaker system

#### Frequency Response

60Hz-20kHz±3dB,-10dB@ 55Hz

#### Drivers

1x15"/3" VC LF Woofer,  
1x1.4" exit HF compression driver

#### Rated Power(RMS)

450W

#### Recommended Amplifier

450W-900W into 8ohms

#### Sensitivity(1W/1m)

99dB

#### Maximum SPL

124dB continuous,130dB peak

#### Nominal Impedance

8 ohms nominal

#### Dispersion(-6dB)

80°horizontal,50°vertical

#### Crossover

1.2kHz Passive

#### Finish

Textured black paint

#### Protective Grille

Black perforated steel

#### Connectors

2x Neutrik speakon NL4

#### Fittings

Top hat fitting

#### Dimensions

(W)430mmx(H)710mmx(D)409mm




#### Weight

37.5KG






# DATASHEET




## FREQUENCY IMPEDANCE DRAWINGS

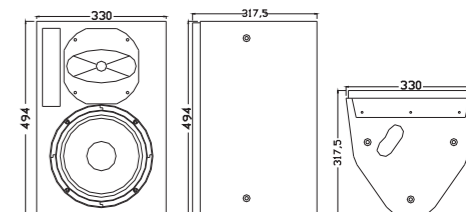

NT-10

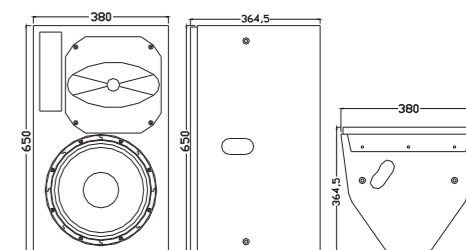

NT-12

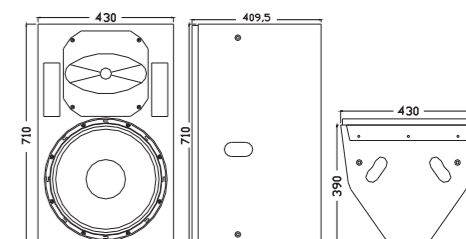

NT-15



# NT SERIES