


MT SERIES

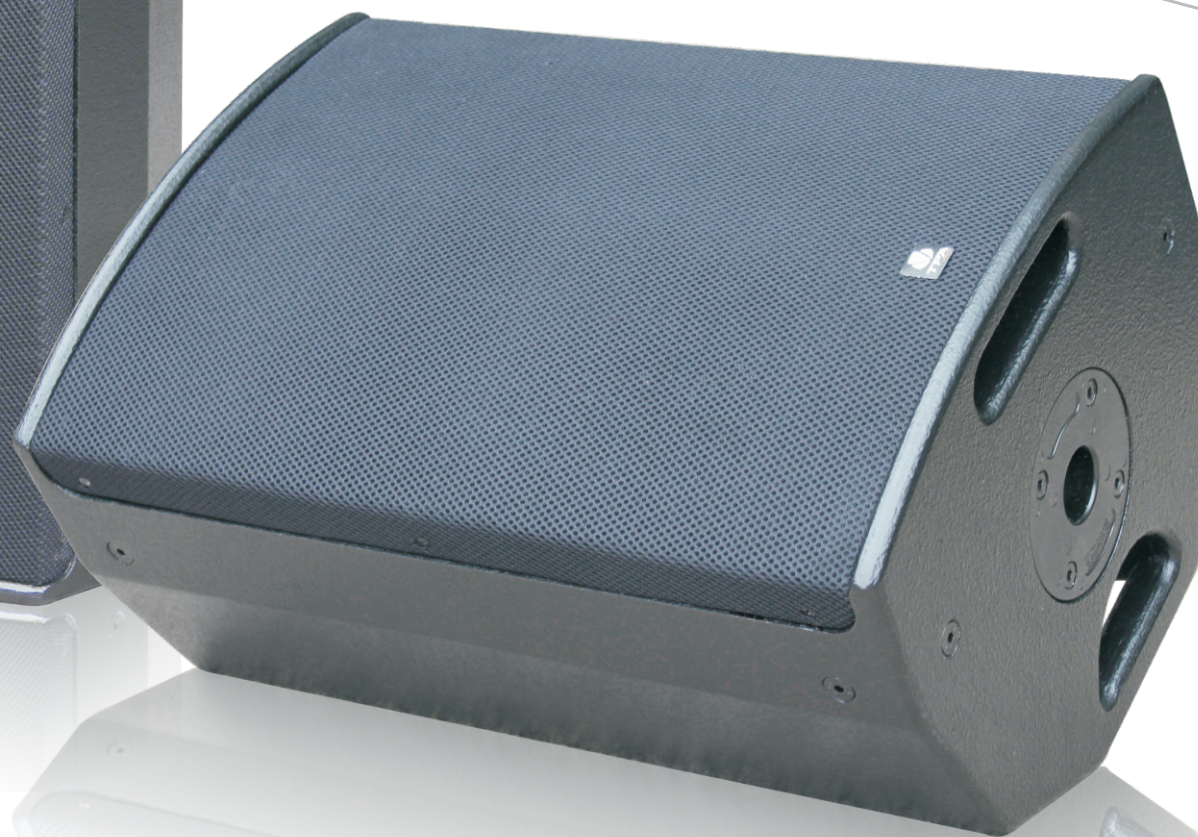


MT SERIES

FULL RANGE

M-10T



The M-10T is a low profile, floor monitor cabinet housing a 10" woofer and a 1" exit compression driver. Equipped with flush handles, steel grille and Speakon NL4 connectors.

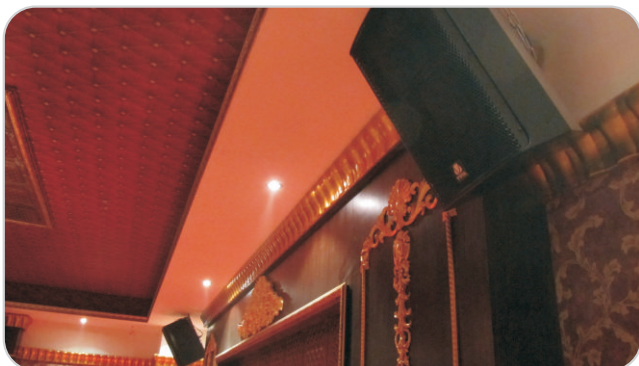

Technical specifications

- Type**
Compact two-way passive Full range
- Frequency Response**
60Hz-20kHz±3dB,-10dB@ 55Hz
- Drivers**
1x10"/1.4" VC LF driver,
1x1" exit HF compression driver
- Rated Power(RMS)**
300W
- Recommended Amplifier**
300W-600W into 8ohms
- Sensitivity(1W/1m)**
95dB
- Maximum SPL**
118dB continuous,124dB peak
- Nominal Impedance**
8 ohms nominal
- Dispersion(-6dB)**
60°
- Crossover**
2kHz Passive
- Finish**
Textured black paint
- Protective Grille**
Black perforated steel
- Connectors**
2x Neutrik speakon NI4
- Fittings**
12xM8 threaded inserts
- Dimensions**
(W)320mmx(H)525mmx(D)258mm
- Weight**
15KG



MT SERIES

M-12T



Technical specifications

- Type**
Compact two-way passive Full range
- Frequency Response**
65Hz-20kHz±3dB,-10dB@ 55Hz
- Drivers**
1x12"/3" VC LF driver,
1x1.4" exit HF compression driver
- Rated Power(RMS)**
400W
- Recommended Amplifier**
400W-800W into 8ohms
- Sensitivity(1W/1m)**
96dB
- Maximum SPL**
122dB continuous,128dB peak
- Nominal Impedance**
8 ohms nominal
- Dispersion(-6dB)**
60°
- Crossover**
2.3kHz Passive
- Finish**
Textured black paint
- Protective Grille**
Black perforated steel
- Connectors**
2x Neutrik speakon NI4
- Fittings**
12xM8 threaded inserts
- Dimensions**
(W)373mmx(H)572mmx(D)313mm
- Weight**
25KG




The M-12T is a low profile, floor monitor cabinet housing a 12" woofer and a 1.4" exit compression driver. Equipped with flush handles, steel grille and Speakon NL4 connectors.

MT SERIES

M-15T

FULL RANGE

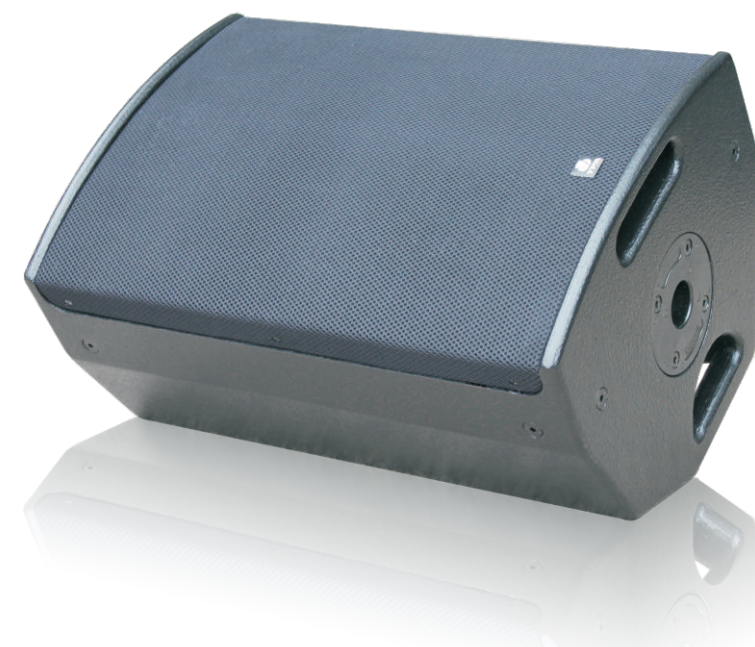

M-15T is a two-way passive loudspeaker. The low/mid section comprises a 15 inch bass driver, the high section includes a 1.4 inch HF driver assembled in a coaxial configuration.



The M-15T provides a very coherent acoustic field with 60° conical coverage. The enclosure comprises three angles side, 15°, 30° and 45° for stage monitor application. As a main F.O.H the M-15T is meant for vocal applications, stage monitoring or distributed sound. The M-15T is also ideal for distributed sound reinforcement and can be used in medium power front-of-house (FOH) applications for theatres, clubs, multi-purpose venues or corporate events. M-15T system has one rectangular acoustic air outlet, constructed by 18-layer birch plywood and finished in black textured paint with perforated steel grille backed with acoustic foam. Multiple rigging points for wall, ceiling and truss mount. Pole mount socket and flush handles.

Technical specifications

Type

Compact two-way coaxial speaker system

Frequency Response

50Hz-20kHz±3dB, -10dB@ 55Hz

Drivers

1x15"/3" VC LF driver,
1x1.4" exit HF compression driver

Rated Power(RMS)

450W

Recommended Amplifier

450W-900W into 8 ohms

Sensitivity(1W/1m)

98dB

Maximum SPL

123dB continuous, 129dB peak

Nominal Impedance

8 ohms nominal

Dispersion(-6dB)

60°

Crossover

2.3kHz Passive

Finish

Textured black paint

Protective Grille

Black perforated steel

Connectors

2x Neutrik speakon NL4

Fittings

12xM8 threaded inserts

Dimensions

(W)430mmx(H)712mmx(D)384mm




Weight

30KG






DATASHEET




FREQUENCY IMPEDANCE DRAWINGS

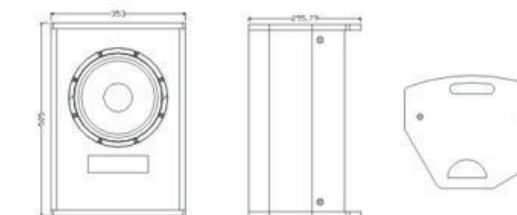

M-10T

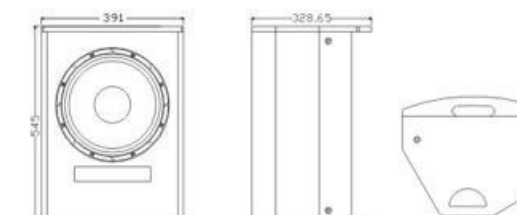

M-12T

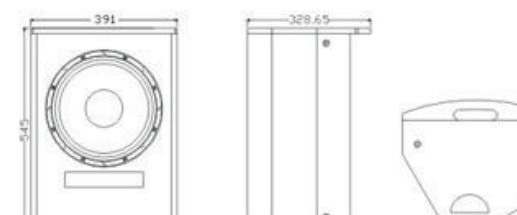

M-15T



MT SERIES